

## 应用领域 | Application


## Professional NVR



## 产品特点 | Features

- 4 4 0
- 5 Support multiple channels HD NVR
- / / Support high performance H.265/H.264 video codec.
- / + 4 0 . Support HDMI/VGA video display.
- : : , YU Support SATA/USB/Ethernet peripherals.

## 主要模块 | Block Diagram

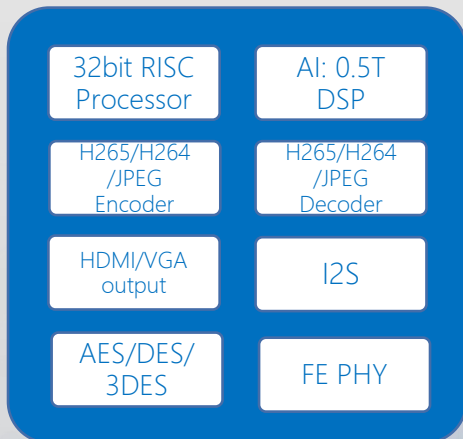

## 产品规格 | Specifications

CPU	Dual Core CPU Support up to 1.3GHz
Video codec	Encoder: 1x1080p@30fps H265/H264, 1x1080p@30fps JPEG Decoder: 6x1080p@25fps H265/H264, 1x1080p@30fps JPEG
NPU	0.5TOPs DSP for AI Application
Video Output	1xHDMI 1.4b output, support up to 4096x2160@30fps 1xVGA output, support up to 1080p@60fps 1xCVBS output
Memory	16bit 1866Mbps DDR3, up to 1GB 1xSPI NOR/NAND Flash
Network	1 internal FE PHY or 1 external Gigabit PHY
Peripherals	1xSATA3, 2xUSB2 3xI2S, 3xUART, 1xI2C, 1xIR, GPIO
Package	TFBGA341, 14mmx14mm
Others	Working temperature: -20°C~70°C Typical power consumption: 1.8W Power supply: Analog: 3.3v, IO: 3.3v/1.8v, Digital: CPU-1.0v, CORE-0.9v

上海 | Shanghai

0 @Z HJ V H S/R SVV +ZY : HUN H  
S 0 00 0 H! 0

深圳 | Shenzhen

VVT :R VY V Y 5V .HV U:V OZ VH  
5Ht: HU+ZY : UA U  
S □

ZHS Z M\$ HJ VT  
NI MSHU VT  
M\$ HJ VT  
ZV RI □ 00Za

